
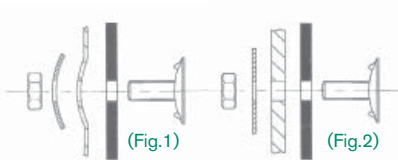


STARCO
PLASTIC
ELEVATOR BUCKET

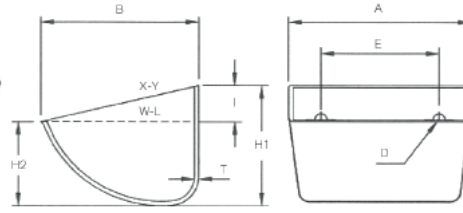

TECHNICAL SPECIFICATION - STARCO PLASTIC ELEVATOR BUCKET

Type	A	B	H1	H2	T	kg HDP	kg PU	kg Nylon	Capacity (W-L)	Capacity (X-Y)	Holes	D	E	I	Max. buckets per meter
Dimensions	mm	mm	mm	mm	mm	kgs.		kgs.	Ltr.	Ltr.	No.	mm	mm	mm	Pcs.
S100-90HDP-MD*	109	90	62	39	4,0	0,06	0,11	0,09	0,21	0,27	2	8,5	50	17	14,2
S130-120HDP-MD*	140	121	81	54	4,7	0,13	0,19	0,16	0,46	0,62	2	8,5	70	22	11,1
S150-110HDP-MD*	159	113	77	52	4,5	0,17	0,25	0,21	0,54	0,67	2	9,0	88	26	12
S180-140HDP-MD*	190	146	94	56	6,0	0,22	0,35	0,29	0,84	1,22	2	9,0	100	30	10,5
S200-140HDP-MD*	203	147	111	58	6,0	0,28	0,48	0,40	1,40	1,96	2	9,0	100	32	9
S230-170HDP-MD*	240	173	113	70	6,0	0,43	0,56	0,47	1,64	2,23	2	11,0	120	38	9
S280-170HDP-MD*	290	173	113	72	6,0	0,50	0,72	0,60	2,02	2,89	3	11,0	80	38	9
S300-180HDP-MD*	315	188	123	81	6,0	0,58	0,90	0,75	3,17	4,25	3	9,0	100	35	8
S330-215HDP-MD*	340	220	138	92	6,5	0,93	1,42	1,18	4,47	5,60	3	11,0	120	38	7
S350-180HDP-MD*	370	188	132	85	7,0	0,79	1,31	1,09	3,66	5,00	4	9,0	90	35	8
S370-215HDP-MD*	380	220	142	90	9,0	1,05	1,68	1,40	5,20	6,20	4	11,0	90	36	7
S150-110HDP(*)	159	113	78	51	5,2	0,17	0,28	0,23	0,49	0,72	2	9,0	89	24	12
S180-140HDP(*)	190	146	94	56	6,0	0,22	0,35	0,29	0,97	1,30	2	9,0	100	30	10,5
S225-140HDP(*)	235	140	94	60	6,0	0,34	0,54	0,45	1,16	1,67	2	9,0	120	30	10,5
S230-170HDP(*)	240	173	110	70	6,0	0,43	0,68	0,57	1,75	2,32	2	11,0	120	35	9
S280-170HDP(*)	290	173	113	72	6,0	0,50	0,80	0,67	2,28	3,00	3	11,0	80	35	9
S300-180HDP(*)	314	181	124	81	6,0	0,58	0,92	0,77	2,70	3,85	3	9,0	102	38	8,13
S350-180HDP(*)	367	181	124	85	7,0	0,79	1,26	1,05	3,30	4,51	4	9,0	90	38	8,13
S330-215HDP	342	222	141	92	8,5	0,93	1,49	1,24	4,51	5,90	3	11,0	120	38	7,14
S370-215HDP(*)	380	218	141	90	9,0	1,07	1,72	1,43	4,60	6,30	4	11,0	90	38	7,14

- Type Starco-MD* elevator bucket has recessed holes on the back of the bucket* and a recess on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt in combination with a concave/domed washer (Fig.1).

- Type Starco(*) elevator bucket has flat holes on the back of the bucket and no recess on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt or Norway elevator bolt (metric) type STM in combination with a flat washer according to DIN9021 (Fig.2). With exception of the S330-215HDP bucket which has recessed holes on the back of the bucket, but no recess on the inside of the bucket and therefore can only except a DIN15237 bolt with flat washer.

- Available in polyethylene (max. temp +80° C.), Polyurethane (max. temp +80° C.) and nylon (max. temp +110° C.).

- FDA 1935/2004

Not legally binding - subject to change and terms. Version 2016 / 1.1